



100V 16.5mΩ Dual N-Ch Power MOSFET

Features

- Low ON-resistance, $R_{DS(ON)}$
- Low Gate Charge, Q_g
- 100% UIS and R_g Tested
- Pb-free Lead Plating
- Halogen-free and RoHS-compliant
- AEC-Q101 Qualified for Automotive Applications

Product Summary


| Parameter | Value | Unit |
|-------------------------------------|-------|------|
| V_{DS} | 100 | V |
| $V_{GS(th_Typ)}$ | 1.8 | V |
| $I_D (@ V_{GS} = 10V)^{(1)}$ | 27 | A |
| $R_{DS(ON_Typ)} (@ V_{GS} = 10V)$ | 16.5 | mΩ |
| $R_{DS(ON_Typ)} (@ V_{GS} = 4.5V)$ | 21 | mΩ |

PDFN5x6-8L-D


Top View




Bottom View



Pin Configuration
Top View



Chip-1 & Chip-2


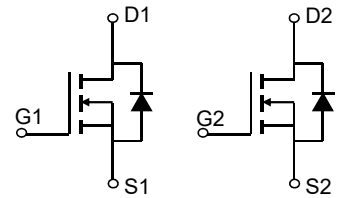


Ordering Information

| Device | Package | # of Pins | Marking | MSL | T_J (°C) | Media | Quantity (pcs) |
|-----------------|--------------|-----------|---------|-----|------------|--------------|----------------|
| JMSL1020AGDQ-13 | PDFN5x6-8L-D | 8 | L1020AD | 1 | -55 to 175 | 13-inch Reel | 5000 |

Absolute Maximum Ratings (@ $T_A = 25^\circ\text{C}$ unless otherwise specified)

| Parameter | Symbol | Value | Unit |
|---|----------------|---------------------------|------|
| Drain-to-Source Voltage | V_{DS} | 100 | V |
| Gate-to-Source Voltage | V_{GS} | ±20 | V |
| Continuous Drain Current ⁽¹⁾ | I_D | $T_C = 25^\circ\text{C}$ | 27 |
| | | $T_C = 100^\circ\text{C}$ | 19 |
| Pulsed Drain Current ⁽²⁾ | I_{DM} | 107 | A |
| Avalanche Current ⁽³⁾ | I_{AS} | 24 | A |
| Avalanche Energy ⁽³⁾ | E_{AS} | 29 | mJ |
| Power Dissipation ⁽⁴⁾ | P_D | $T_C = 25^\circ\text{C}$ | 31 |
| | | $T_C = 100^\circ\text{C}$ | 16 |
| Junction & Storage Temperature Range | T_J, T_{STG} | -55 to 175 | °C |

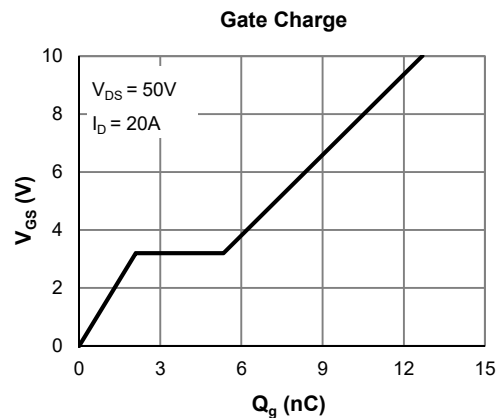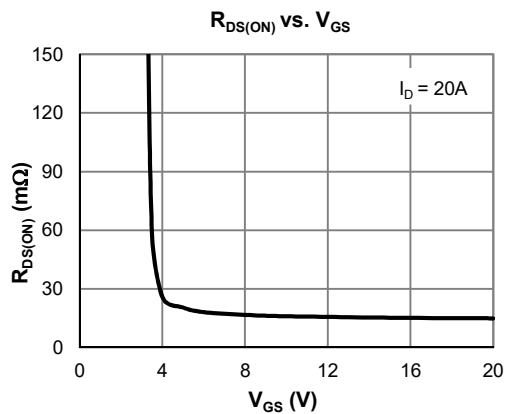

**Electrical Characteristics** (@ $T_J = 25^\circ\text{C}$ unless otherwise specified)







| Parameter | Symbol | Conditions | Min. | Typ. | Max. | Unit |
|---|---------------|--|------|------|------------|------------------|
| STATIC PARAMETERS | | | | | | |
| Drain-Source Breakdown Voltage | $V_{(BR)DSS}$ | $I_D = 250\mu\text{A}, V_{GS} = 0\text{V}$ | 100 | | | V |
| Zero Gate Voltage Drain Current | I_{DSS} | $V_{DS} = 80\text{V}, V_{GS} = 0\text{V}$ $T_J = 55^\circ\text{C}$ | | | 1.0 5.0 | μA |
| Gate-Body Leakage Current | I_{GSS} | $V_{DS} = 0\text{V}, V_{GS} = \pm 20\text{V}$ | | | ± 100 | nA |
| Gate Threshold Voltage | $V_{GS(th)}$ | $V_{DS} = V_{GS}, I_D = 250\mu\text{A}$ | 1.2 | 1.8 | 2.5 | V |
| Static Drain-Source ON-Resistance | $R_{DS(on)}$ | $V_{GS} = 10\text{V}, I_D = 20\text{A}$ | | 16.5 | 20 | $\text{m}\Omega$ |
| | | $V_{GS} = 4.5\text{V}, I_D = 15\text{A}$ | | 21 | 27 | $\text{m}\Omega$ |
| Forward Transconductance | g_{FS} | $V_{DS} = 5\text{V}, I_D = 20\text{A}$ | | 48 | | S |
| Diode Forward Voltage | V_{SD} | $I_S = 1\text{A}, V_{GS} = 0\text{V}$ | | 0.68 | 1.0 | V |
| Diode Continuous Current | I_S | $T_C = 25^\circ\text{C}$ | | | 31 | A |
| DYNAMIC PARAMETERS ⁽⁵⁾ | | | | | | |
| Input Capacitance | C_{iss} | $V_{GS} = 0\text{V}, V_{DS} = 50\text{V}, f = 1\text{MHz}$ | | 769 | | pF |
| Output Capacitance | C_{oss} | | | 171 | | pF |
| Reverse Transfer Capacitance | C_{rss} | | | 5.1 | | pF |
| Gate Resistance | R_g | $V_{GS} = 0\text{V}, V_{DS} = 0\text{V}, f = 1\text{MHz}$ | | 1.9 | | Ω |
| SWITCHING PARAMETERS ⁽⁵⁾ | | | | | | |
| Total Gate Charge (@ $V_{GS} = 10\text{V}$) | Q_g | $V_{GS} = 0 \text{ to } 10\text{V}$ $V_{DS} = 50\text{V}, I_D = 20\text{A}$ | | 12.7 | | nC |
| Total Gate Charge (@ $V_{GS} = 4.5\text{V}$) | Q_g | | | 6.7 | | nC |
| Gate Source Charge | Q_{gs} | | | 2.1 | | nC |
| Gate Drain Charge | Q_{gd} | | | 3.3 | | nC |
| Turn-On DelayTime | $t_{D(on)}$ | | | 4.3 | | ns |
| Turn-On Rise Time | t_r | $V_{GS} = 10\text{V}, V_{DS} = 50\text{V}$ $R_L = 2.5\Omega, R_{GEN} = 6\Omega$ | | 5.1 | | ns |
| Turn-Off DelayTime | $t_{D(off)}$ | | | 16.7 | | ns |
| Turn-Off Fall Time | t_f | | | 8.7 | | ns |
| Body Diode Reverse Recovery Time | t_{rr} | $I_F = 15\text{A}, dI_F/dt = 100\text{A}/\mu\text{s}$ | | 39 | | ns |
| Body Diode Reverse Recovery Charge | Q_{rr} | $I_F = 15\text{A}, dI_F/dt = 100\text{A}/\mu\text{s}$ | | 30 | | nC |

Thermal Performance

| Parameter | Symbol | Typ. | Max. | Unit |
|---|-----------------|------|------|---------------------------|
| Thermal Resistance, Junction-to-Ambient | $R_{\theta JA}$ | 58 | 70 | $^\circ\text{C}/\text{W}$ |
| Thermal Resistance, Junction-to-Case | $R_{\theta JC}$ | 4.8 | 5.7 | $^\circ\text{C}/\text{W}$ |

Notes:

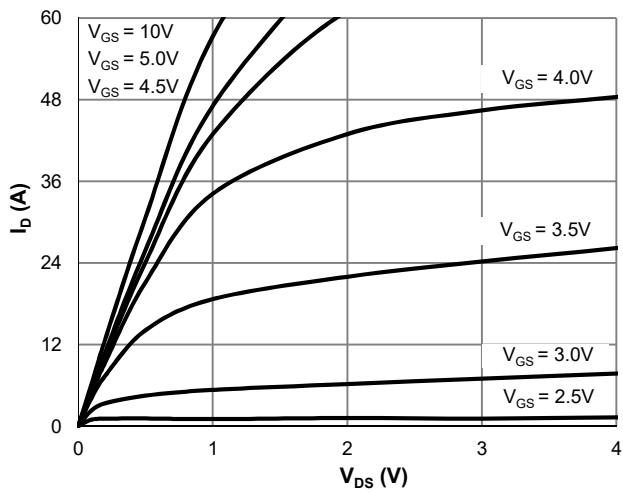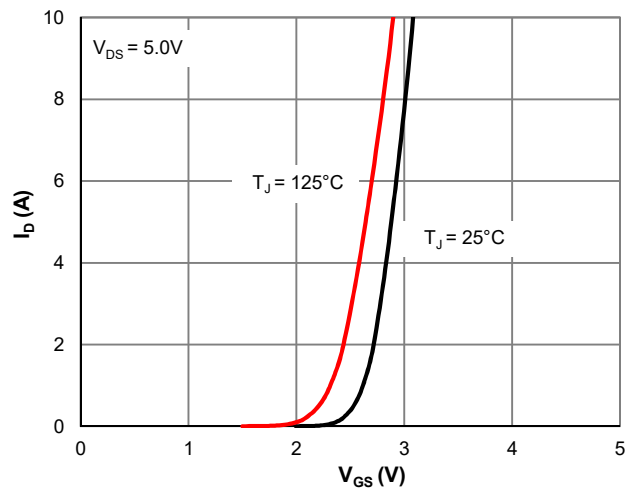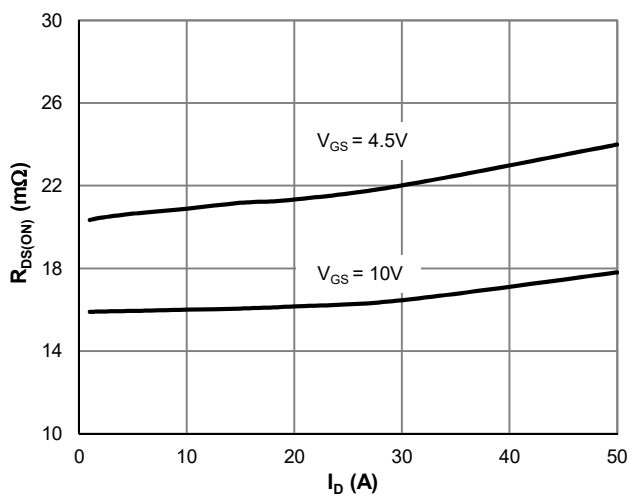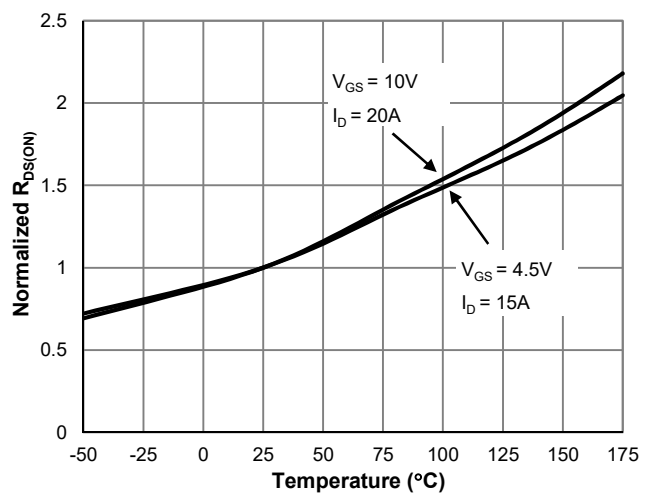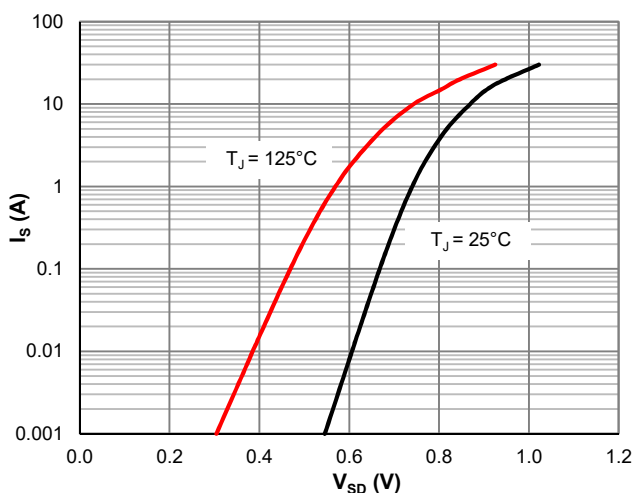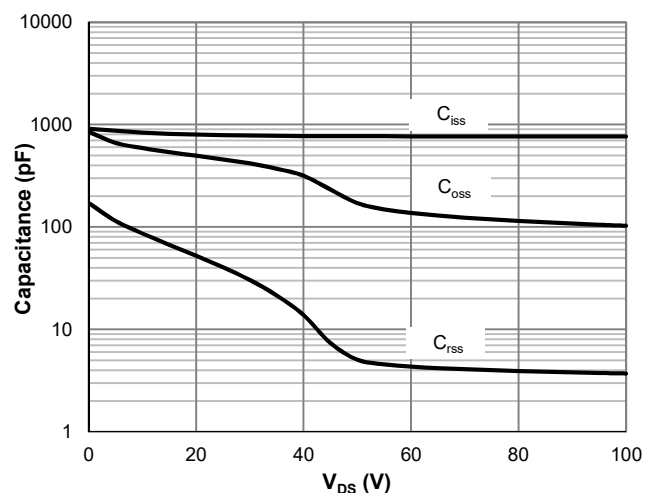1. Computed continuous current assumes the condition of T_{J_Max} while the actual continuous current depends on the thermal & electro-mechanical application board design.
2. This single-pulse measurement was taken under $T_{J_Max} = 175^\circ\text{C}$.
3. This single-pulse measurement was taken under the following condition [L = 100 μH , $V_{GS} = 10\text{V}$, $V_{DS} = 50\text{V}$] while its value is limited by $T_{J_Max} = 175^\circ\text{C}$.
4. The power dissipation P_D is based on $T_{J_Max} = 175^\circ\text{C}$.
5. This value is guaranteed by design hence it is not included in the production test.

Typical Electrical & Thermal Characteristics

Figure 1: Saturation Characteristics

Figure 2: Transfer Characteristics

Figure 3: $R_{DS(ON)}$ vs. Drain Current

Figure 4: $R_{DS(ON)}$ vs. Junction Temperature

Figure 5: Body-Diode Characteristics

Figure 6: Capacitance Characteristics

Typical Electrical & Thermal Characteristics

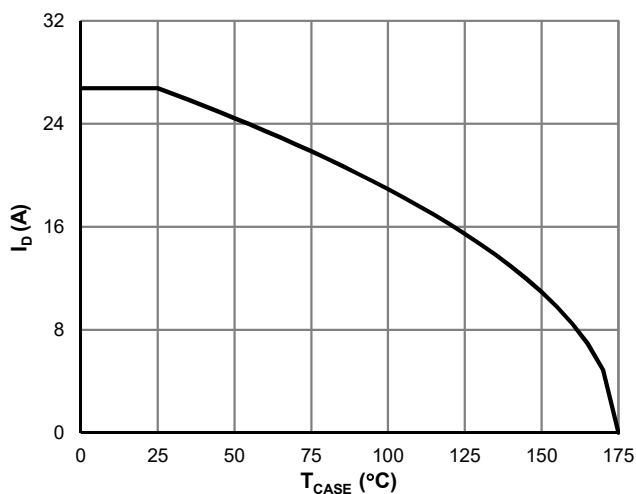


Figure 7: Current De-rating

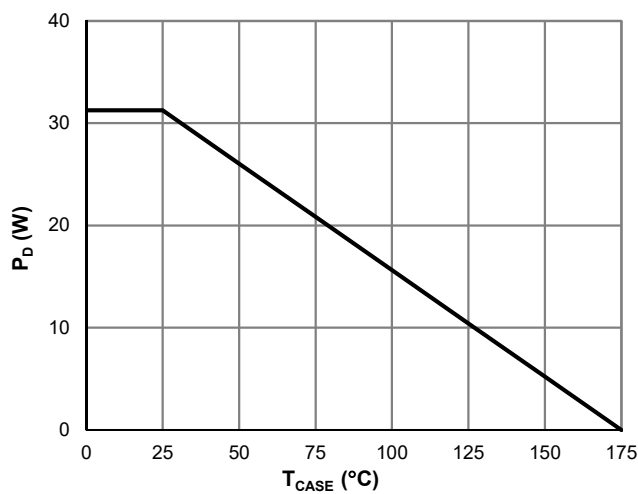


Figure 8: Power De-rating

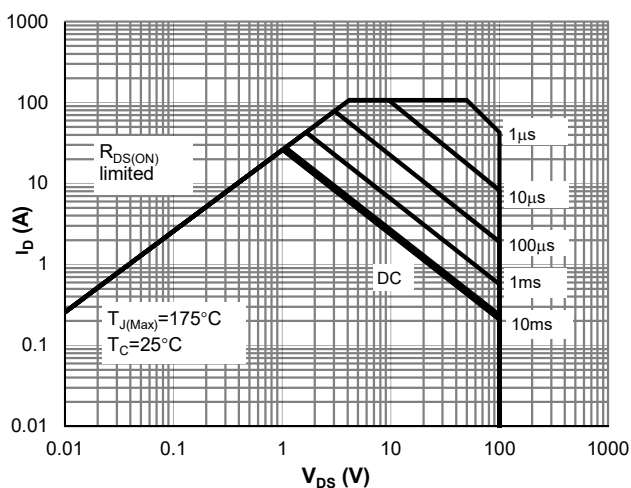


Figure 9: Maximum Safe Operating Area

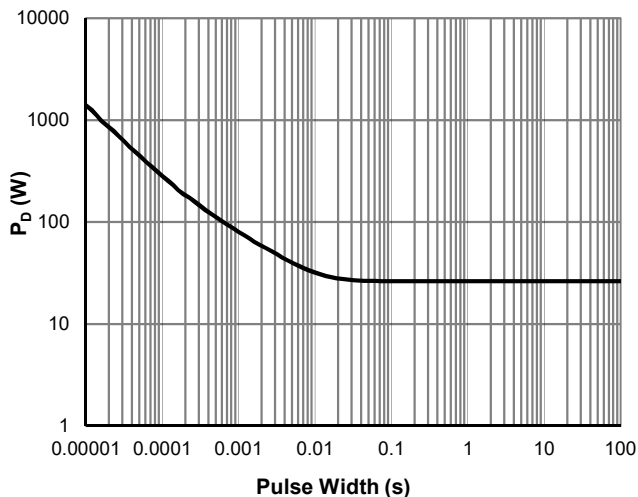


Figure 10: Single Pulse Power Rating, Junction-to-Case

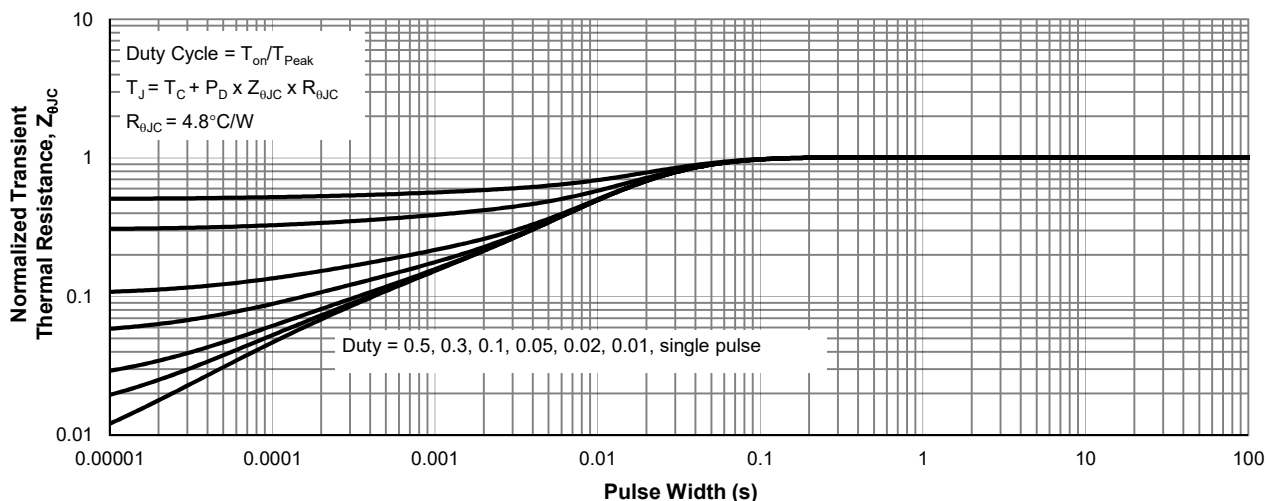
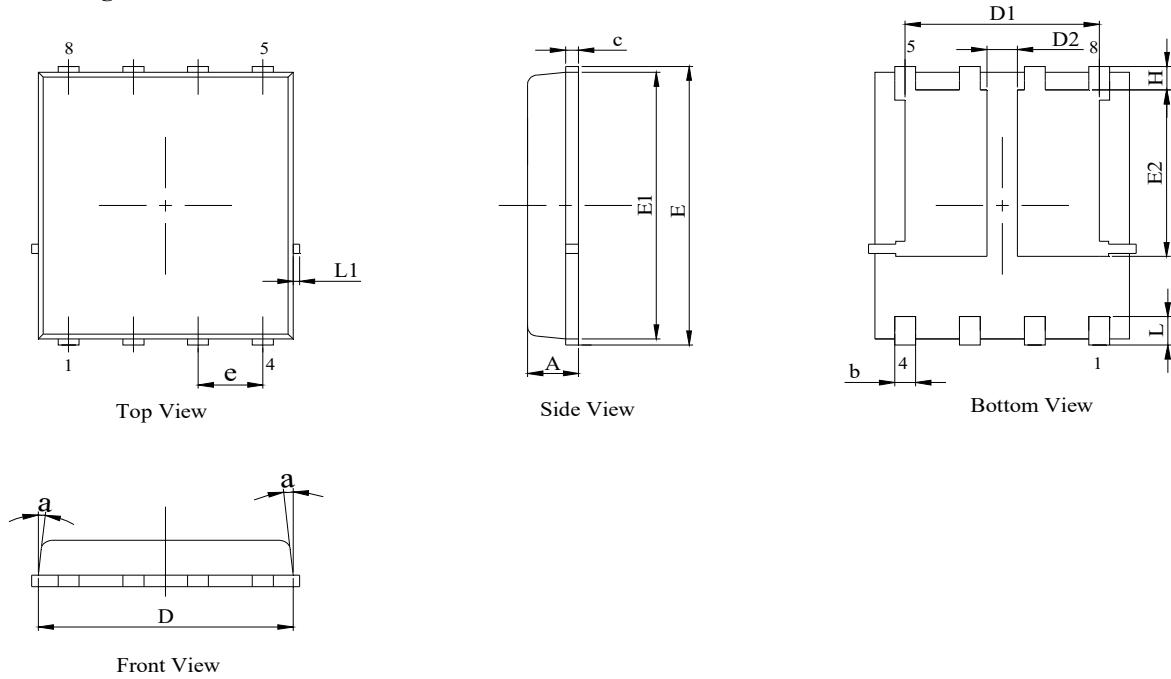
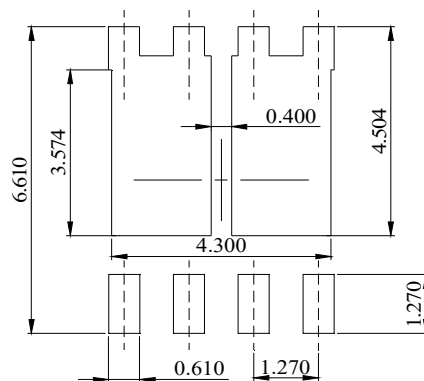


Figure 11: Normalized Maximum Transient Thermal Impedance

PDFN5x6-8L-D Package Information
Package Outline

NOTES:

1. Dimension and tolerance per ASME Y14.5M, 1994.
2. All dimensions in millimeter (angle in degree).
3. Dimensions D and $E1$ do not include mold flash protrusions or gate burrs.

| DIM. | MILLIMETER | |
|------|------------|------|
| | MIN. | MAX. |
| A | 0.90 | 1.10 |
| b | 0.33 | 0.51 |
| c | 0.23 | 0.33 |
| D | 4.80 | 5.40 |
| D1 | 3.61 | 4.25 |
| D2 | 0.50 | 0.70 |
| E | 5.90 | 6.25 |
| E1 | 5.55 | 5.80 |
| E2 | 3.35 | 3.78 |
| e | 1.27 BSC | |
| H | 0.41 | 0.80 |
| L | 0.51 | 0.80 |
| L1 | - | 0.15 |
| a | 0° | 12° |

Recommended Soldering Footprint


DIMENSIONS: MILLIMETERS