




P0300SBA TSS

Rev.1.1

DESCRIPTION:


P0300SBA thyristor is a type of semiconductor component. It is designed to protect baseband equipment from damaging overvoltage transients. Such as modems, telephones, line cards, answering machines, FAX machines, T1/E1, xDSL and more.



SMB

FEATURES:

- ✧ Low profile package.
- ✧ Low on-state voltage.
- ✧ Excellent capability of absorbing transient surge.
- ✧ Quick response to surge voltage (ns Level).
- ✧ Eliminates overvoltage caused by fast rising transients.
- ✧ Moisture sensitivity level: Level 1.
- ✧ UL 497B item recognized. (File No.: E480698).
- ✧ IEC61000-4-2 (ESD) $\pm 30\text{kV}$ (air), $\pm 30\text{kV}$ (contact).
- ✧ Non degenerative.




Symbol

ABSOLUTE MAXIMUM RATINGS ($T_A=25^\circ\text{C}$, RH=45%-75%, unless otherwise noted)

| Parameter | Symbol | Value | Unit |
|---|-----------|-------------|------------------|
| Storage temperature range | T_{STG} | -60 to +150 | $^\circ\text{C}$ |
| Operating junction temperature range | T_J | -40 to +125 | $^\circ\text{C}$ |
| Repetitive peak pulse current@10/1000 μs | I_{PP} | 80 | A |

ELECTRICAL CHARACTERISTICS ($T_A=25^\circ\text{C}$)

| Symbol | Parameter |
|-----------|------------------------|
| V_{DRM} | Peak off-state voltage |
| I_{DRM} | Off-state current |
| V_S | Switching voltage |
| I_S | Switching current |
| V_T | On-state voltage |
| I_T | On-state current |
| I_H | Holding current |
| C_o | Off-state capacitance |

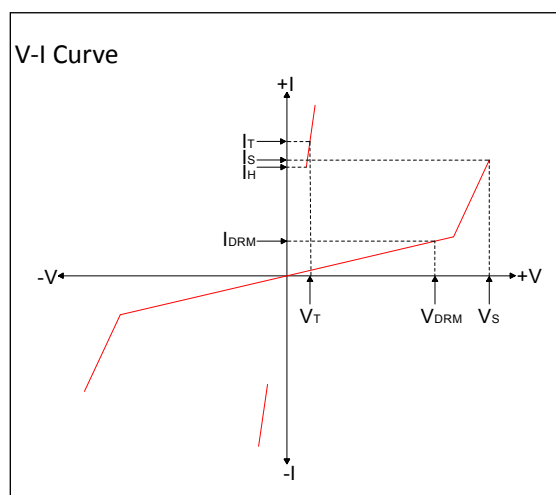

MARKING



P03BA: Device Marking Code
1940: the 40th week, 2019

ELECTRICAL CHARACTERISTICS (T_A=25°C, continued)

| Part Number | I _{DRM} @V _{DRM} | | V _S ^① @I _S | | V _T @I _T | | I _H | Co ^② | Marking |
|-------------|------------------------------------|----|---|-----|--------------------------------|-----|----------------|-----------------|---------|
| | μA | V | V | mA | V | A | mA | pF | |
| | max | | max | max | max | max | min | max | |
| P0300SBA | 1 | 28 | 40 | 800 | 4.0 | 2.2 | 50 | 70 | P03BA |


① V_S is measured at 100kV/s

② Off-state capacitance is measured in V_{DC}=2V, V_{RMS}=1V, f=1MHz

SURGE RATINGS

| Series | I _{PP} (A) min | | | |
|--------|-------------------------|--------|----------|-----------|
| | 2/10μs | 8/20μs | 10/360μs | 10/1000μs |
| B | 250 | 250 | 125 | 80 |

ORDERING INFORMATION

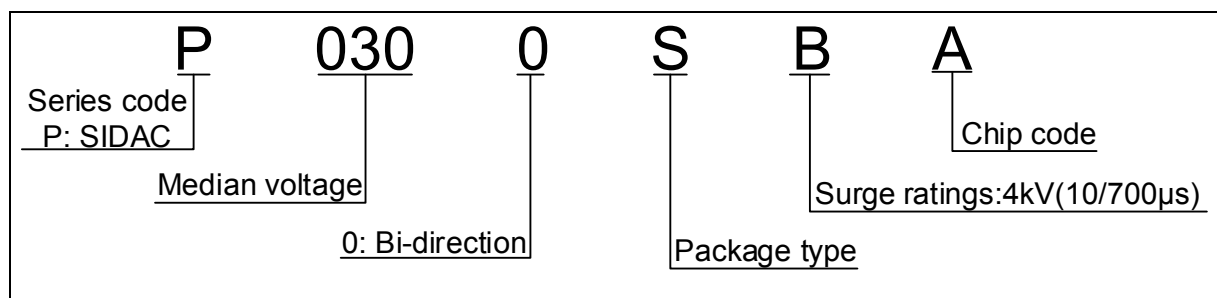

SOLDERING PARAMETERS

| | | |
|---|-----------------------------------|---------------------------------|
| Reflow Condition | | Pb-Free assembly (see FIG.2) |
| Pre Heat | -Temperature Min ($T_{s(min)}$) | +150°C |
| | -Temperature Max($T_{s(max)}$) | +200°C |
| | -Time (Min to Max) (ts) | 60-180 secs. |
| Average ramp up rate (Liquidus Temp (T_L)to peak) | | 3°C/sec. Max |
| $T_{s(max)}$ to T_L - Ramp-up Rate | | 3°C/sec. Max |
| Reflow | -Temperature(T_L) (Liquidus) | +217°C |
| | -Temperature(t_L) | 60-150 secs. |
| Peak Temp (T_p) | | +260(+0/-5)°C |
| Time within 5°C of actual Peak Temp (t_p) | | 30 secs. Max |
| Ramp-down Rate | | 6°C/sec. Max |
| Time 25°C to Peak Temp (T_P) | | 8 min. Max |
| Do not exceed | | +260°C |

FIG.1: tr × td pulse waveform

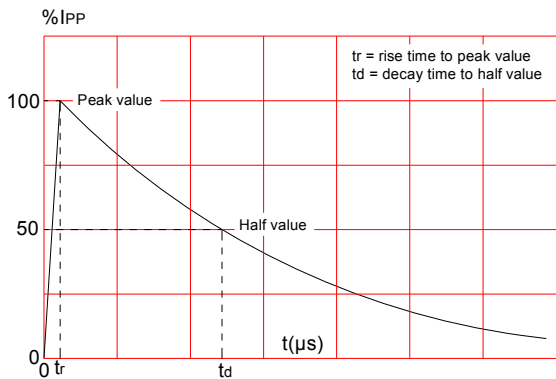


FIG.2: Reflow condition

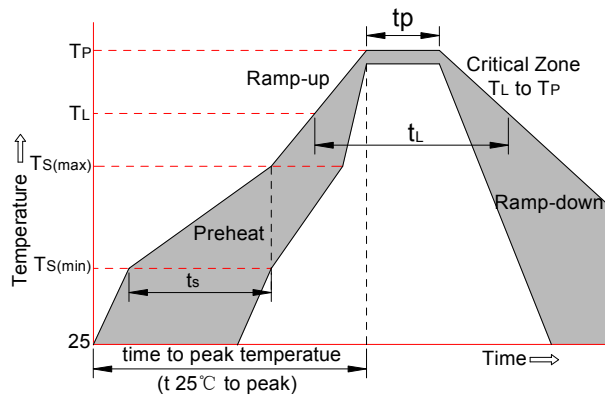


FIG.3: Normalized Vs change vs. junction temperature



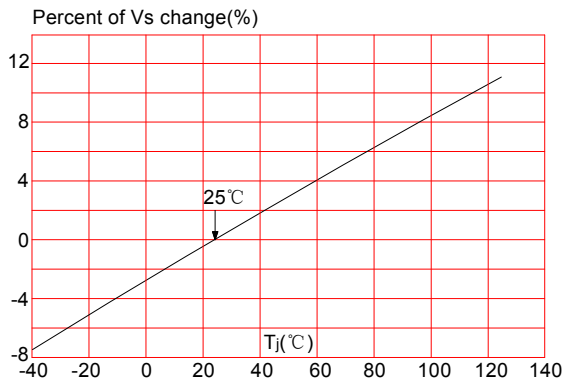


FIG.4: Normalized DC holding current vs. case temperature

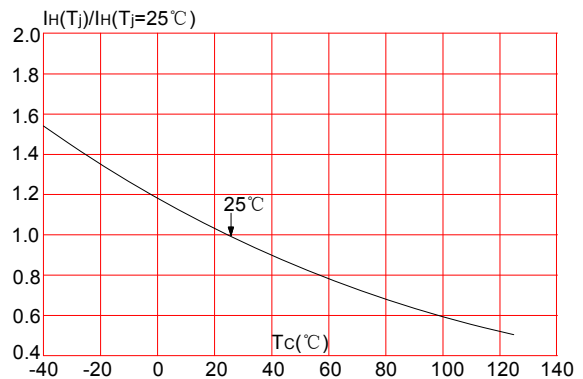


PACKAGE MECHANICAL DATA

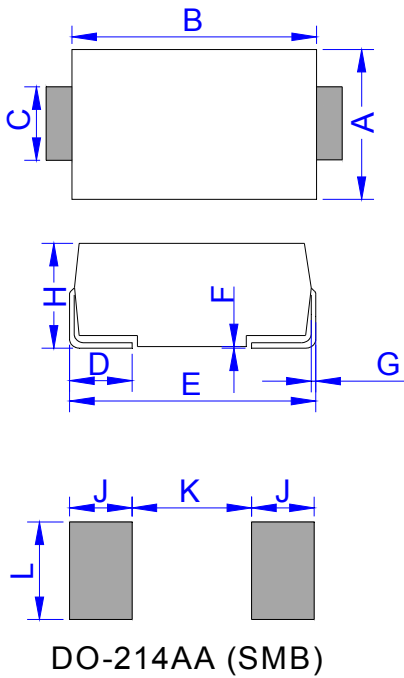

| Ref. | Dimensions | | | |
|------|-------------|-------|--------|-------|
| | Millimeters | | Inches | |
| | Min. | Max. | Min. | Max. |
| A | 3.30 | 3.94 | 0.130 | 0.155 |
| B | 4.30 | 4.80 | 0.169 | 0.189 |
| C | 1.90 | 2.20 | 0.075 | 0.087 |
| D | 0.95 | 1.52 | 0.037 | 0.060 |
| E | 5.20 | 5.60 | 0.205 | 0.220 |
| F | 0.051 | 0.203 | 0.002 | 0.008 |
| G | 0.15 | 0.31 | 0.006 | 0.012 |
| H | 2.10 | 2.40 | 0.083 | 0.094 |
| J | 2.20 | | 0.087 | |
| K | | 2.60 | | 0.102 |
| L | 2.30 | | 0.091 | |


TAPE AND REEL SPECIFICATION-SMB

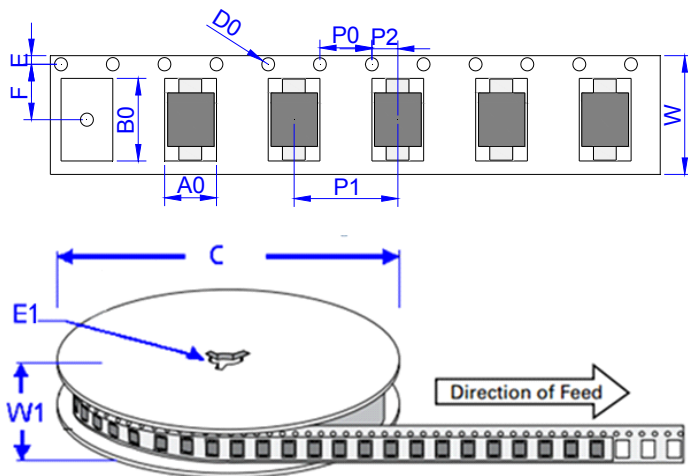

| Ref. | Dimensions | |
|------|-------------|----------------|
| | Millimeters | Inches |
| A0 | 3.76 ± 0.3 | 0.148 ± 0.012 |
| B0 | 5.69 ± 0.3 | 0.224 ± 0.012 |
| C | 330.0 | 13.0 |
| D0 | 1.55 ± 0.1 | 0.061 ± 0.004 |
| E | 1.75 ± 0.2 | 0.069 ± 0.008 |
| E1 | 13.3 ± 0.3 | 0.524 ± 0.012 |
| F | 5.5 ± 0.2 | 0.217 ± 0.008 |
| P0 | 4.00 ± 0.2 | 0.157 ± 0.008 |
| P1 | 8.00 ± 0.2 | 0.3145 ± 0.008 |
| P2 | 2.00 ± 0.2 | 0.079 ± 0.008 |
| W | 12.0 ± 0.2 | 0.472 ± 0.008 |
| W1 | 15.7 ± 2.0 | 0.618 ± 0.079 |

| PART No. | UNIT WEIGHT (g/PCS) typ. | REEL (PCS) | PER CARTON (PCS) | DESCRIPTION |
|----------|--------------------------|------------|------------------|-------------------|
| P0300SBA | 0.098 | 3,000 | 48,000 | 13 inch reel pack |

Information furnished in this document is believed to be accurate and reliable. However, Jiangsu JieJie Microelectronics Co.,Ltd assumes no responsibility for the consequences of use without consideration for such information nor use beyond it. Information mentioned in this document is subject to change without notice, apart from that when an agreement is signed, Jiangsu JieJie complies with the agreement. Products and information provided in this document have no infringement of patents. Jiangsu JieJie assumes no responsibility for any infringement of other rights of third parties which may result from the use of such products and information. This document is the 1.1st version which is made in 7-Aug.-2021. This document supersedes and replaces all information previously supplied.

 is a registered trademark of Jiangsu JieJie Microelectronics Co.,Ltd.

Copyright©2021 Jiangsu JieJie Microelectronics Co.,Ltd. Printed All rights reserved.