## **JOC340 Series**

## 1.0A, Gate Driver Photo Coupler


## **Description**

The JOC340 series Photocoupler is ideally suited for driving power IGBTs and MOSFETs used in motor control inverter applications and inverters in power supply system. It contains an LED optically coupled to an integrated circuit with a power output stage.

The Photocoupler operational parameters are guaranteed over the temperature range from -40 $^{\circ}$  C  $\sim$  +110 $^{\circ}$ C.

#### **Features**

- 1.0 A maximum peak output current
- Rail-to-rail output voltage
- 110 ns maximum propagation delay
- Under Voltage Lock-Out protection (UVLO) with hysteresis
- Wide operating range: 10 to 30 Volts (V<sub>CC</sub>)
- Guaranteed performance over temperature
   -40°C ~ +110°C.



## PIN DEFINITION

6.VCC

1.Anode

5.VO

3.Cathode

4.VSS

#### **PACKAGE**



# **Applications**

- Isolated IGBT/Power MOSFET gate drive
- Industrial Inverter
- AC brushless and DC motor drives
- Induction Heating

1

TRUTH TABLE								
LED	V <sub>CC</sub> -V <sub>SS</sub> (Turn-ON, +ve going)	V <sub>CC</sub> -V <sub>SS</sub> (Turn-OFF, -ve going)	Vo					
Off	0V to 30V	0V to 30V	Low					
On	0V to 6.9V	0V to 5.9V	Low					
On	6.9V to 8.7V	5.9V to 7.5V	Transition					
On	8.7V to 30V	7.5V to 30V	High					

Note: A  $0.1\mu F$  bypass capacitor must be connected between Pin 4 and 6.

ABSOLUTE MAXIMUM RATINGS										
PARAMETER	SYMBOL	Min	Max	UNIT	Note					
Storage Temperature	Tstg	-55	125	°C	-					
Operating Temperature	Topr	-40	110	°C	-					
Output IC Junction Temperature	Τı	-	125	°C	-					
Total Output Supply Voltage	(Vcc –Vss)	0	35	V	-					
Average Forward Input Current	lF	-	20	mA	-					
Reverse Input Voltage	Vr	-	5	V	-					
"High" Peak Output Current	Іон(реак)		1.0	Α	1					
"Low" Peak Output Current	IOL(PEAK)		1.0	Α	1					
Output Voltage	VO(PEAK)	-0.5	Vcc	V	-					
Power Dissipation	Pı	-	45	mW	-					
Output IC Power Dissipation	Po	-	250	mW	-					
Lead Solder Temperature	Tsol	-	260	°C	-					

Note: Ambient temperature = 25°C, unless otherwise specified. Stresses exceeding the absolute maximum ratings can cause permanent damage to the device. Exposure to absolute maximum ratings for long periods of time can adversely affect reliability.

Note 1: Exponential waveform. Pulse width  $\leq$  10  $\mu$ s, f  $\leq$  15 kHz

RECOMMENDED OPERATION CONDITIONS									
PARAMETER SYMBOL MIN. MAX. UNIT									
Operating Temperature	TA	-40	110	°C					
Supply Voltage	Vcc	10	30	V					
Input Current (ON)	I <sub>F(ON)</sub>	7	16	mA					
Input Voltage (OFF)	V <sub>F</sub> (OFF)	-3.0	0.8	V					

ELECTRICAL OPTICAL CHARACTERISTICS										
PARAMETER	SYMBOL	MIN.	TYP.	MAX.	UNIT	TEST CONDITION	NOTE			
INPUT CHARACTERISTICS										
Forward Voltage	VF	1.6	1.9	2.4	V	I <sub>F</sub> = 10 mA	-			
Input Forward Voltage Temperature Coefficient	ΔVF/ ΔΤ	-	-1.237	-	mV/°C	IF=10mA	1			
Input Reverse Voltage	BVR	5	-	-	V	IR = 10μA	-			
Input Threshold Current (Low to High)	Іғін	ı	0.6	2	mA	$V_0 > 5V$ , $I_0 = 0A$	-			
Input Threshold Voltage (High to Low)	VFHL	0.8	-	-	V	Vcc = 30 V, Vo < 5V	-			
Input Capacitance	Cin	-	60	-	pF	VF = 0, f = 1MHz	-			
	•	OUTF	PUT CHAR	ACTERIS	STICS					
High Level Supply Current	Іссн	-	1.55	3	mA	$I_F = 10 \text{ mA}, \ V_{CC} = 30 \text{ V},$ $V_O = \text{Open}, \ Rg = 30\Omega, \ Cg = 3 \text{ nF}$				
Low Level Supply Current	Iccl	-	1.92	3	mA	$I_F$ = 0 mA, $V_{CC}$ = 30 V, $V_O$ = Open, $Rg$ = 30 $\Omega$ , $Cg$ = 3 nF				
High Level Output Voltage	Vон	29.4	29.69	-	V	I <sub>F</sub> = 10 mA, I <sub>O</sub> = -100 mA	2,3			
Low Level Output Voltage	Vol	-	0.17	0.4	V	$I_F = 0 \text{ mA}, I_O = 100 \text{ mA}$				
High Level Output Current	Іон	1.0	-	-	А	$I_F = 10 \text{ mA}, V_{CC} = 30V$ $V_O = V_{CC} - 4$	1			
Low Level Output Current	l <sub>OL</sub>	1.0	-	-	А	$I_F = 0 \text{ mA}, V_{CC} = 30V$ $V_O = V_{SS} + 4$	1			
Under Voltage Lockout	VUVLO+	6.9	7.8	8.7	V	$V_0 > 5V$ , $I_F = 10 \text{ mA}$				
Threshold	VUVLO-	5.9	6.9	7.5	V	Vo < 5V, I <sub>F</sub> = 10 mA				

All Typical values at  $T_A$  = 25°C and  $V_{CC}$  –  $V_{SS}$  = 30 V, unless otherwise specified; all minimum and maximum specifications are at recommended operating condition.

Note 1: Maximum pulse width =  $10 \mu s$ .

Note 2: In this test VOH is measured with a dc load current. When driving capacitive loads, VOH will approach VCC as IOH approaches zero amps.

Note 3: Maximum pulse width = 1 ms.

SWITCHING SPECIFICATION										
PARAMETER	SYMBOL	MIN.	TYP.	MAX.	UNIT	TEST CONDITION	NOTE			
SWITCHING CHARACTERISTICS										
Propagation Delay Time	t <sub>PHL</sub>	-	54	110	ns					
to Output Low Level	LPHL						-			
Propagation Delay Time	tou	_	69	110	ns	Rg = $47 \Omega$ ,				
to Output High Level	t <sub>PLH</sub>	-	09			Cg = 3 nF,	-			
Pulse Width Distortion	PWD	-	22	70	ns	f = 10kHz,	_			
T dies Width Bistortion					110	Duty Cycle = 50%				
Propagation Delay Difference	PDD	-100	_	+100	ns	I <sub>F</sub> = 10mA,	_			
Between Any Two Parts	(t <sub>PHL</sub> - t <sub>PLH</sub> )		100			Vcc = 30V				
Rise Time	t <sub>r</sub>	-	35	-	ns		-			
Fall Time	t <sub>f</sub>	-	25	-	ns		-			
Common Mode Transient	odo Transiant					I <sub>F</sub> =7 to 16mA V <sub>CC</sub> = 30V,				
Immunity at Logic High	СМн	20	40	-	kV/μs	T <sub>A</sub> = 25 °C,	1,2			
inindrity at Logic riigh						V <sub>CM</sub> = 1kV				
Common Mode Transient	Mode Transient CML	20	40	1	kV/µs	I <sub>F</sub> =0mA V <sub>CC</sub> = 30V,				
Immunity at Logic Low						T <sub>A</sub> = 25 °C,	1,3			
minumity at Logic Low						V <sub>CM</sub> = 1kV				

All Typical values at  $T_A = 25$ °C and  $V_{CC} - V_{SS} = 30$  V, unless otherwise specified; all minimum and maximum specifications are at recommended operating condition.

Note 1:Pin 2 needs to be connected to LED common.

Note 2: Common mode transient immunity in the high state is the maximum tolerable dVCM/dt of the common mode pulse, VCM, to assure that the output will remain in the high state (meaning VO > 10.0V).


Note 3: Common mode transient immunity in a low state is the maximum tolerable dVCM/dt of the common mode pulse, VCM, to assure that the output will remain in a low state (meaning VO < 1.0V).


ISOLATION CHARACTERISTIC										
Parameter	Symbo	Device	Min.	Тур.	Max.	Unit	Test Condition	Note		
Withstand Insulation	\/	JOC340SL	5000		-	٧	RH ≤ 40%-60%,	4.0		
Test Voltage	V <sub>ISO</sub>	JOC340SLM					$t = 1min, T_A = 25 °C$	1,2		
Input-Output	R <sub>I-O</sub>		-	1012	-	Ω	V <sub>I-O</sub> = 500V DC	1		
Resistance		-						ı		

All Typical values at  $T_A$  = 25°C and  $V_{CC}$  –  $V_{SS}$  = 30 V, unless otherwise specified; all minimum and maximum specifications are at recommended operating condition.

Note 1: Device is considered a two terminal device: pins 1, 2, 3 are shorted together and pins 4, 5, 6 are shorted together.

Note 2: According to UL1577, each photocoupler is tested by applying an insulation test voltage 6000VRMS for one second. This test is performed before the 100% production test for partial discharge.

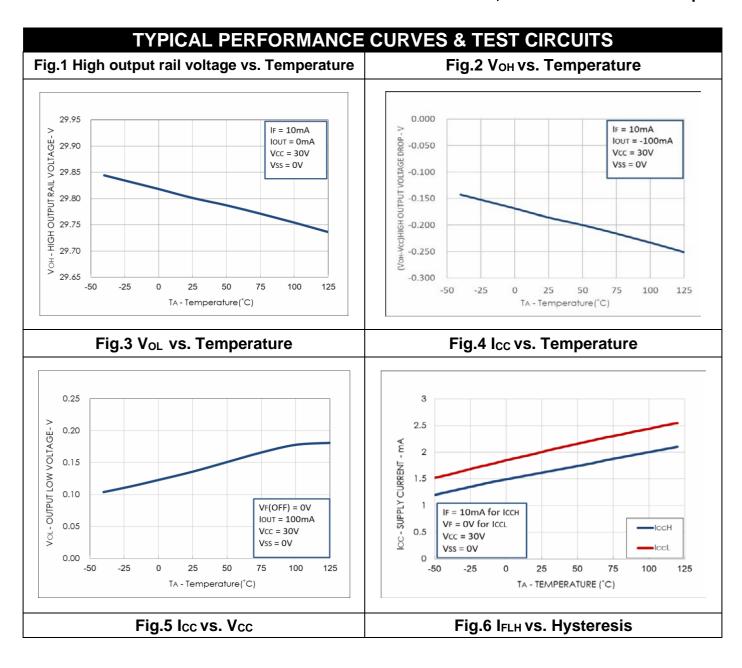

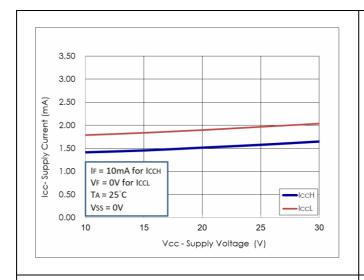

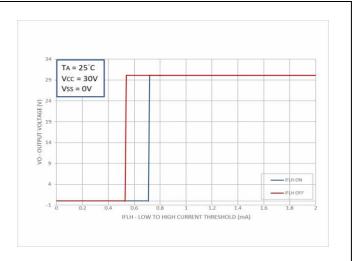


Fig.7 I<sub>FH</sub> vs. Temperature

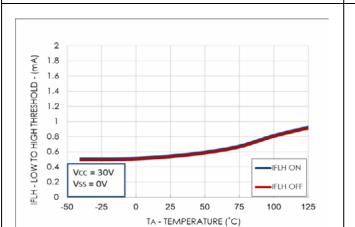


Fig.8 Propagation Delays vs. Vcc

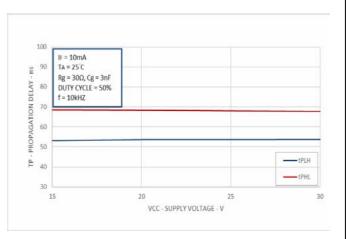


Fig.9 Propagation Delays vs. IF

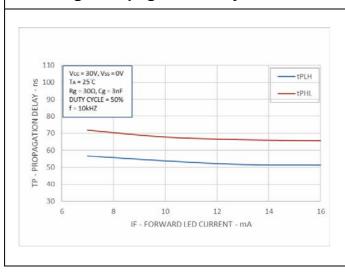


Fig.10 Propagation Delays vs. Temperature

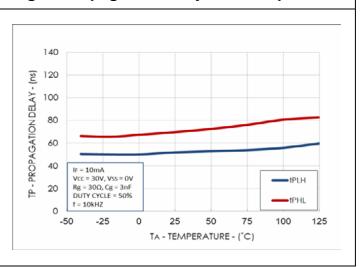


Fig.11 Propagation Delays vs. Rg

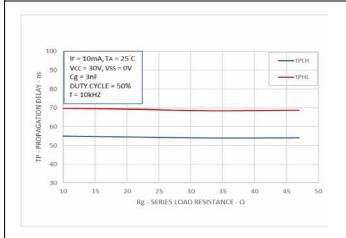
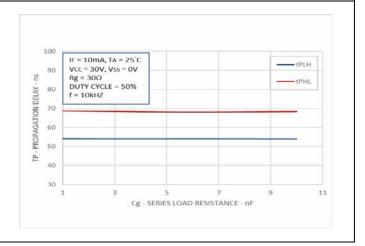
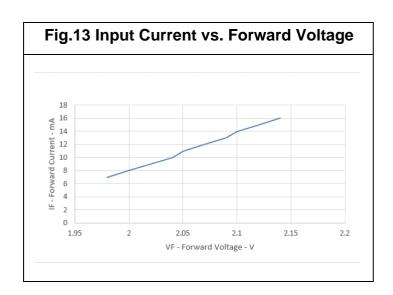
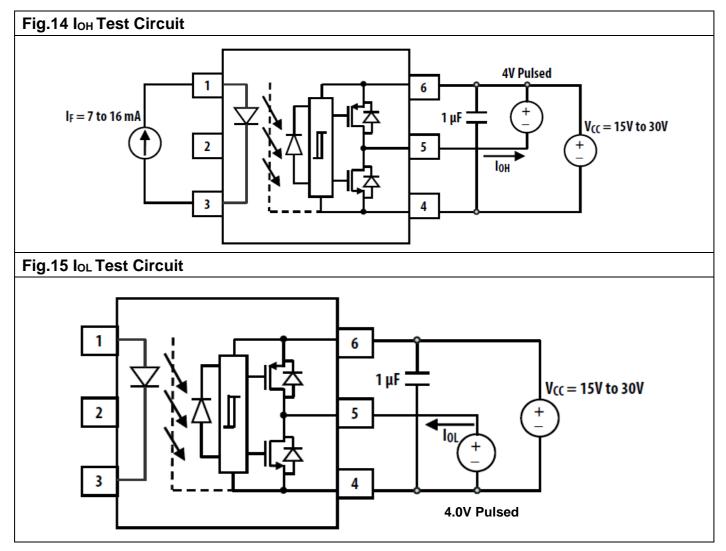
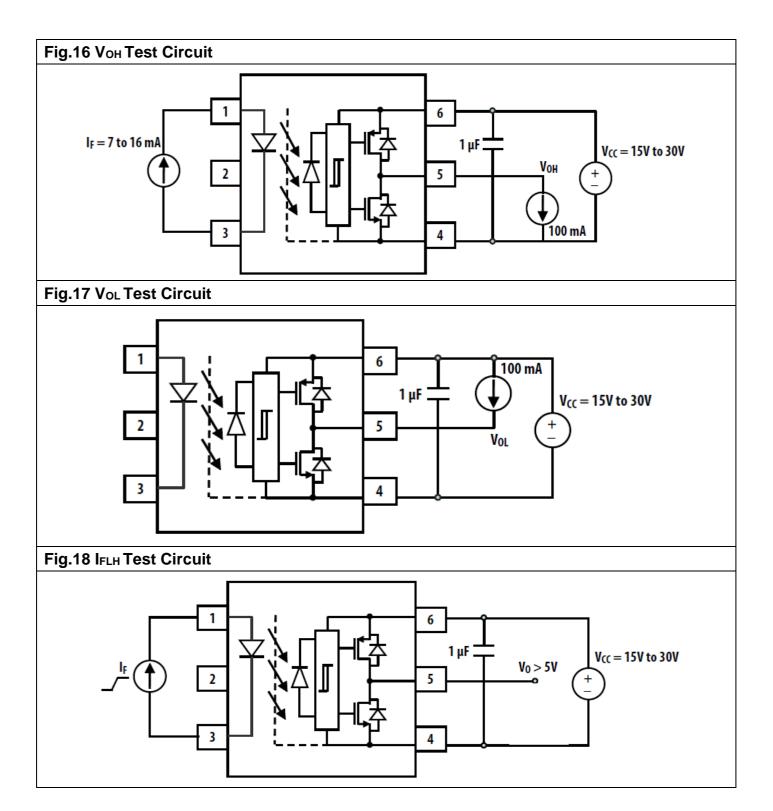



Fig.12 Propagation Delays vs. Cg









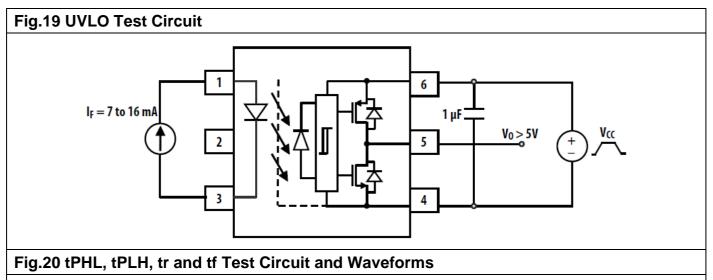



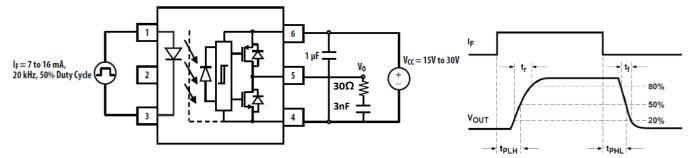


Fig.21 CMR Test Circuit with Split Resistors Network and Waveforms



# PACKAGE DIMENSIONS (Dimensions in mm unless otherwise stated) **Surface Mount Lead Forming SL** type Dimension 2.54±0.25 1.27±0.25 1.27 $6.81\pm0.30$ 10.50 0.40±0.10 0.80 0.20~0.30 $0.20\pm0.10$ 4.50±0.30 7.70±0.30 $1.80\pm0.30$ 0.95±0.25 9.70±0.30 **SLM type Dimension** 2.54±0.25 1.27±0.25 $6.81\pm0.30$ 9.20 0.40±0.10 0.80 0.20±0.10 4.50±0.30<sub>1</sub> 7.70±0.30 $1.80\pm0.30$ 0.75±0.25 PACKAGE DIMENSIONS (Dimensions in mm unless otherwise stated)

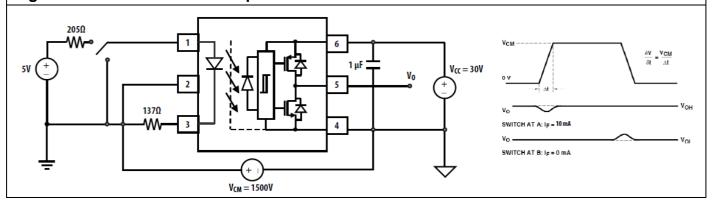

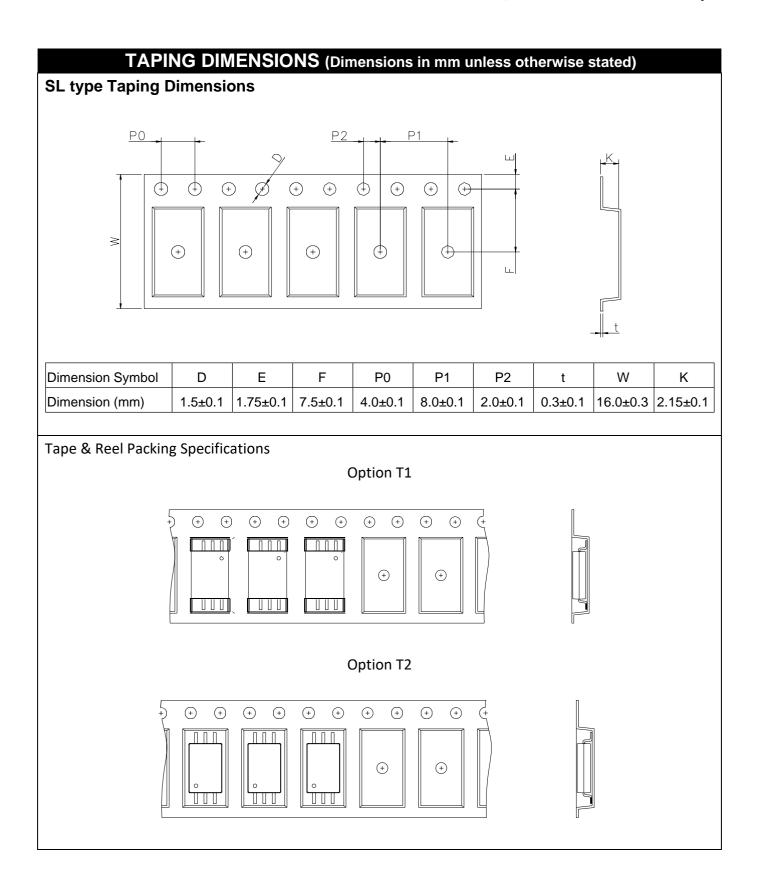



**JOC**: Company Abbr.

340 : Part Number & Rank

V : VDE Option

Y : Fiscal Year

Y: Manufacturing Code

**WW: Work Week** 

#### **ORDERING INFORMATION**

# **JOC340(Y)(Z)-GV**

JOC- Company Abbr.

340 - Part Number

Y – Lead Form Option

Z – Tape and Reel Option (T1/T2)

G – Green

V – VDE Option (V or None)

#### DISCLAIMER

- JIEJIE is continually improving the quality, reliability, function and design. JIEJIE reserves the right to make changes without further notices.
- The characteristic curves shown in this datasheet are representing typical performance which are not guaranteed.
- JIEJIE makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, JIEJIE disclaims (a) any and all liability arising out of the application or use of any product, (b) any and all liability, including without limitation special, consequential or incidental damages, and (c) any and all iMPCied warranties, including warranties of fitness for particular
- The products shown in this publication are designed for the general use in electronic applications such as office automation, equipment, communications devices, audio/visual equipment, electrical application and instrumentation purpose, non-infringement and merchantability.
- This product is not intended to be used for military, aircraft, medical, life sustaining or lifesaving applications or any other application which can result in human injury or death.
- Please contact JIEJIE sales agent for special application request.
- Immerge unit's body in solder paste is not recommended.
- Parameters provided in datasheets may vary in different applications and performance may vary
  over time. All operating parameters, including typical parameters, must be validated in each
  customer application by the customer's technical experts. Product specifications do not expand or
  otherwise modify JIEJIE's terms and conditions of purchase, including but not limited to the
  warranty expressed therein.
- Discoloration might be occurred on the package surface after soldering, reflow or long-time use. It neither impacts the performance nor reliability.